

DOPS60EL

24" DOUBLE MULTI-FUNCTION OVEN

Porter & Charles

DOPS60EL

24" DOUBLE MULTI-FUNCTION OVEN



TOP OVEN PROGRAMS

- Defrost
- Conventional cooking
- Convection
- Fan Assist
- Half Grill
- Half Grill
- Full Grill
- Fan Assist Grill
- High bake
- Low bake
- Pizza mode

BOTTOM OVEN

- Conventional cooking
- High bake
- Low bake
- Fan assist
- Fan assist grill

OVEN FEATURES

- Two 24" (60cm) built-in stainless steel and black glass oven
- 92 litre / 3.24 cu. Ft. capacity per oven
- LCD touch display with electronic temperature control
- 10 cooking functions including True Fan convection in top oven
- 5 cooking functions in bottom oven
- Down fold door
- Excellent heat stability and insulation
- Fully automatic clock / timer
- Black enamel interior
- Triple glazed oven door

OVEN CLEANING FEATURES

- Low temperature catalytic continuous clean liners
- Removable door and glass panes for easy cleaning

OVEN ACCESSORIES

- Grill/roasting pan
- Reversible grill insert
- 2 chrome oven racks

Specifications

24" DOUBLE MULTI-FUNCTION OVEN

OVEN DIMENSIONS

- D: 21^{7/8"} x W: 23^{5/8"} x H: 45^{1/16"}
- D: 555 mm x W: 600 mm x H: 1144 mm

CUT-OUT DIMENSIONS

- D: min. 22^{1/16"} x W: min. 22^{3/16"} x H: 44^{3/4"}
- D: min 560mm x W: min. 564mm x H: 1137mm

CONDO ELECTRICAL REQUIREMENTS

- 208 Volt, 60Hz, 4550 Watt, 30 AMP

HOUSE ELECTRICAL REQUIREMENTS


- 240 Volt, 60Hz, 6050 Watt, 30 AMP

IMPORTANT

- PORTER&CHARLES ovens are supplied with a 4' long electrical cable and must be hard wired to the electrical supply
- PORTER&CHARLES ovens uses the following wires:
RED & BLACK: Live Wires
GREEN: Ground
The Neutral (White) wire is not required for the electrical installation.

VOID CUT-OUT

- If the oven is mounted in a tall or demi-tall cabinet, there must be a minimum gap of 1^{9/16"} (4cm) cut out of the shelf and behind the upper cabinet to allow air to flow freely
- A void must be cut-out in the shelf of the cabinet. Leave 4" of shelf material around the void.
- Additional support must be added to the shelf with the void. The support must be able to withstand the oven weight.
- If sufficient air flow is not provided, the life of the appliance will be shortened.
- Cut-out in the toe kick is optional and recommended.
- Optional bottom vent grill (7427640) available.

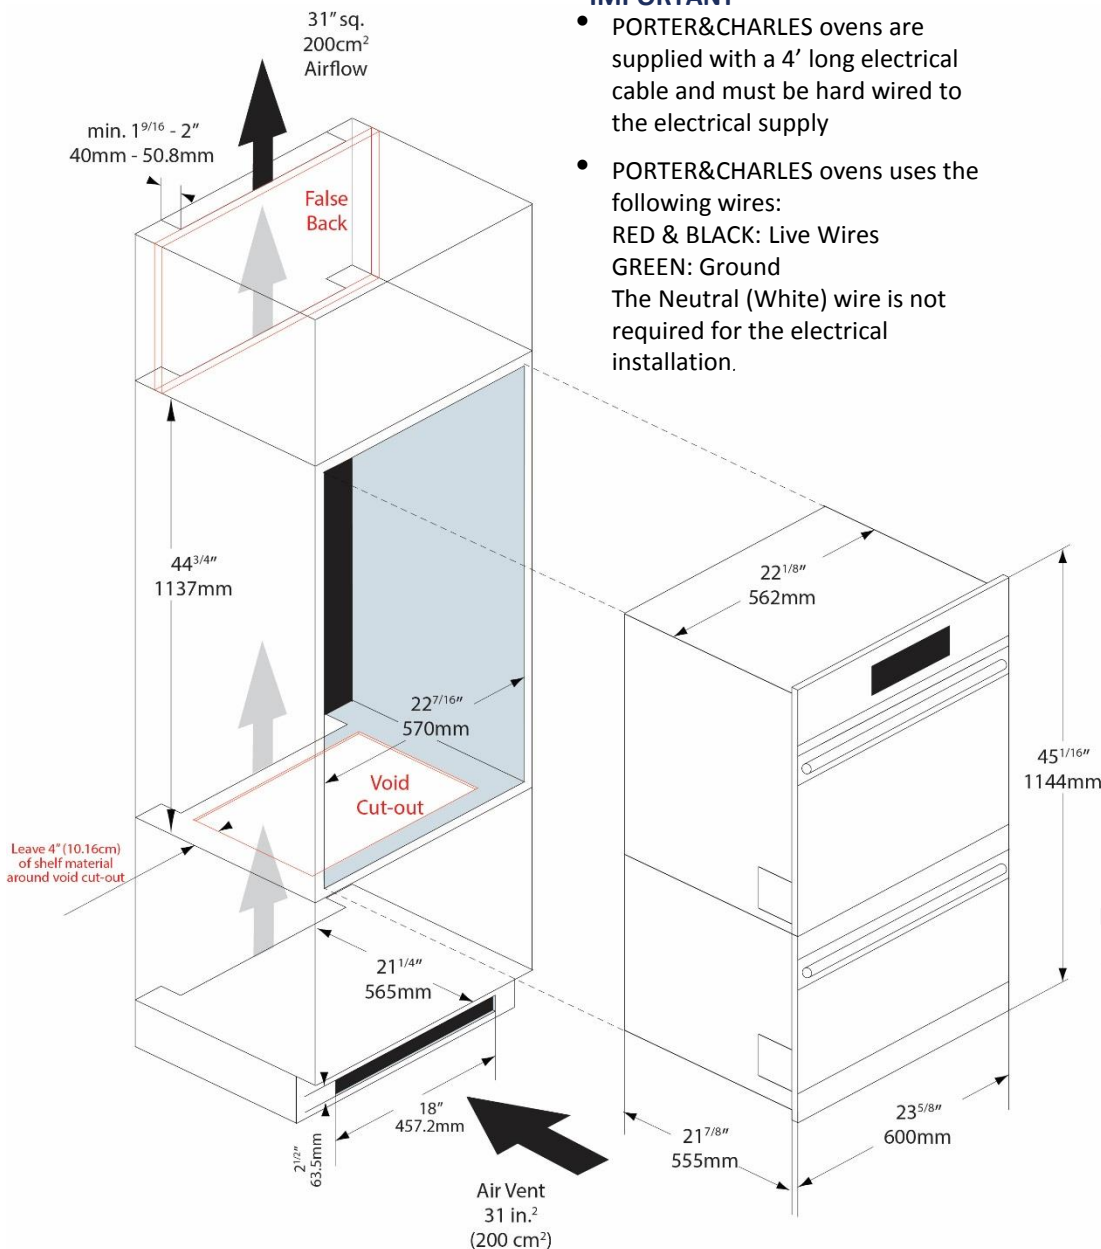

FALSE BACKS

- Install false backs for storage spaces. This will prevent contents from falling through the vent space. In addition, warm air will not interfere with your stored contents

Porter & Charles appliances are designed and manufactured to the highest standards.
Each appliance is covered by a comprehensive 2 year parts and labour warranty.

www.porterandcharles.com

Refer to product warranty policy for complete terms and conditions.

FOR PARTS & SERVICE

Euro-Parts & Service
39822 Belgrave Road
Belgrave, ON N0G 1E0
1-800-678-8352 (CANADA)
1-800-561-4614 (USA)
www.euro-parts.ca
parts@euro-parts.ca
service@euro-parts.ca

Porter & Charles appliances are imported & distributed in North America by Euro-Line Appliances Inc.

For more information please visit one of our showrooms or

www.euro-line-appliances.com / www.elawest.com

EURO-LINE APPLIANCES INC.

871 Cranberry Court
Oakville, ON L6L 6J7
905-829-3980
1-800-421-6332
marketing@euro-line-appliances.com

EURO-LINE APPLIANCES WEST INC.

2912 West 4th Avenue
Vancouver, BC V6K 1R2
604-235-3980
1-855-ELA-WEST
info@elawest.com